

# Assembly Instructions for Swing Chair Stand

## How to Assemble Stand

See Diagram A below

**1** Insert the tapered ends of the long portion of the two L-shaped base rails (B) into the two ends of the U-shaped base rail (A). The u-shaped piece is the front of the stand.

*Your stand is now assembled. Please take a minute to make sure that all of the tubing parts are fitting completely over the tapered portion of the companion part.*

**2** Insert the open end of the straight uprights (C) into the curved part of the L-shaped base rails (B).

**3** Attach the braces (F) to the L-shaped rails (B) and straight uprights (C) by using the bolts (I) and lock nuts (J) enclosed in the hardware bag.

**4** Insert the open end of the bent uprights (D) into the tapered portion of the straight uprights (C). **SUGGESTION:** You may need an additional person to help hold the two uprights (D) while you proceed to step five.

**5** Insert the V-shaped header bar (E) over the tapered part of the bent uprights (D). You may need a ladder or stool to stand on to reach above the bent uprights. The S-hook which is attached to the header bar should face to the front. See diagram for the front.

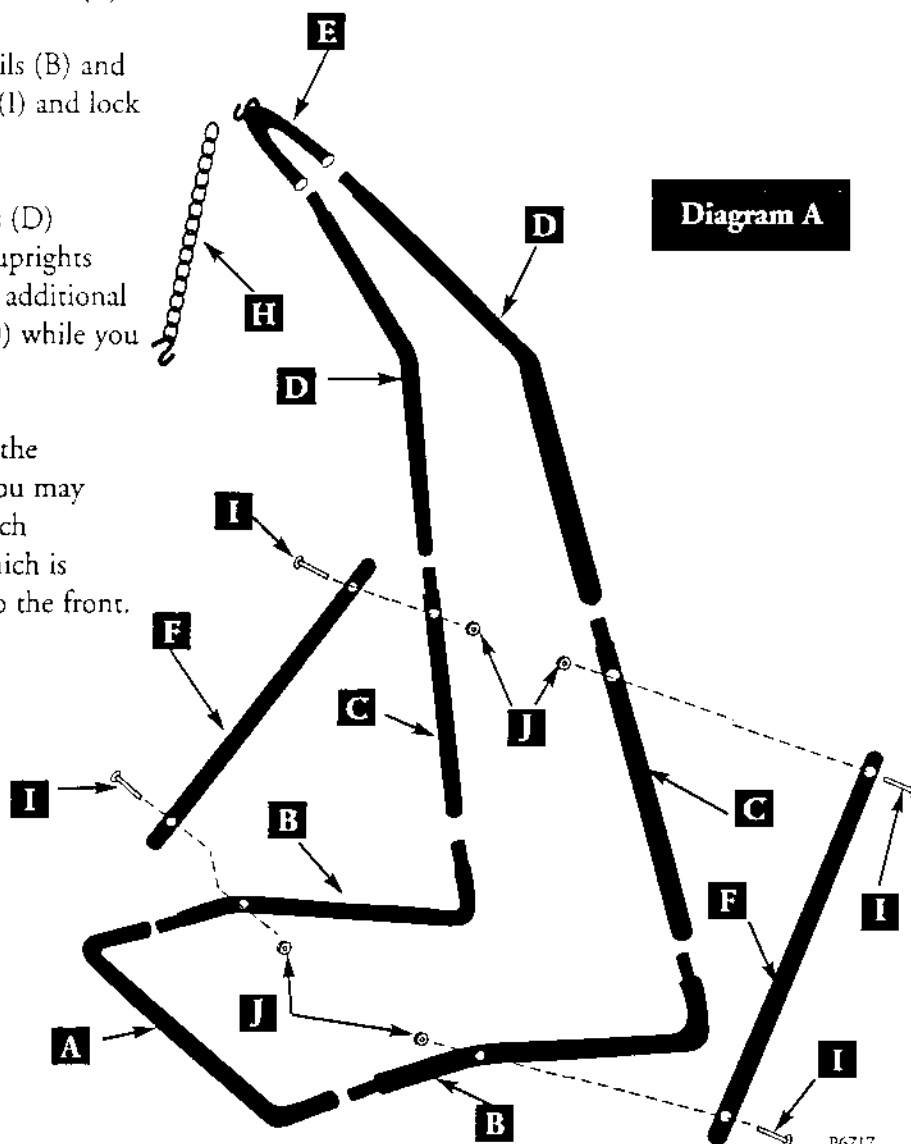


Diagram A

**TOOLS REQUIRED**  
**2 - 9/16" OPEN END WRENCHES**  
**OR 2 ADJUSTABLE WRENCHES.**